


# Local Controller Unit

Local Controller Unit [VGS-LCU]

## VGS-LCU

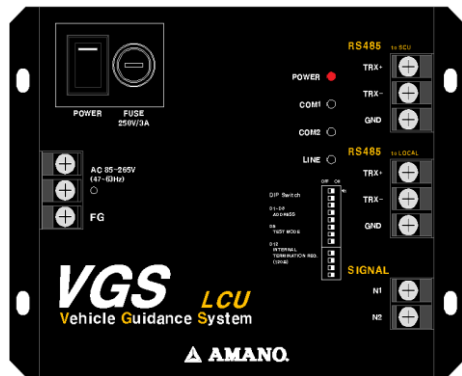


### Features

- Parking bay sensor, block indicator, and signboard are connected to control these devices and transmit various events to the system controller.

### Specification

- Power Supply : AC100~240V (50/60Hz) / Max.23W (Standby 5W)
- Operating environment : Indoor Type, Temperature : -10°C~50°C, Humidity : 90% or less (no condensation)
- Material : SPCC 1.0t (Powder coating)
- Terminal Number : 1~16 (Dip Switch)
- Communication :

• Non-polar 2-wire DC POWER LINE (FMO)	:	Parking bay sensor, Block indicator
• RS-485	:	Signboard
• RS-485	:	System Control Unit

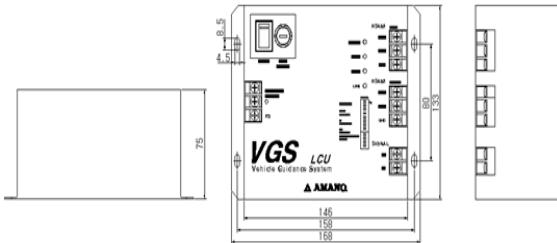

 Install Image

